



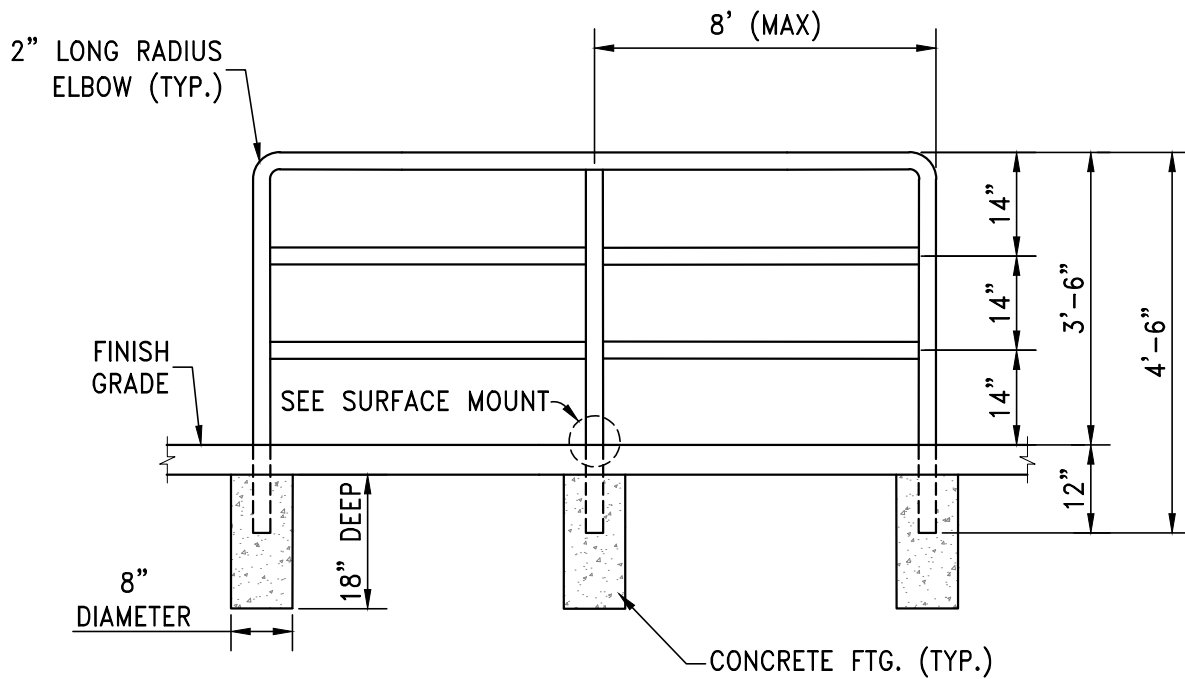

DIRECT BURY

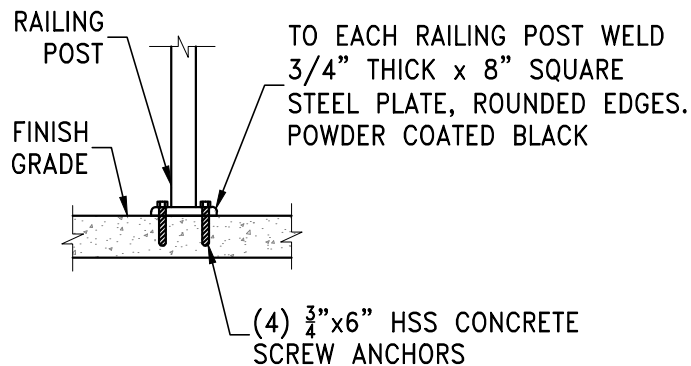

SURFACE MOUNT

NOTES:

1. RAILING TO BE 2" ROUND SCH 40 STEEL PIPE. POWDER COAT BLACK.
2. VERTICAL POSTS TO BE EQUALLY SPACED.
3. PORTLAND CEMENT CONCRETE (P.C.C.) SHALL BE 4000 PSI MIN. COMPRESSIVE STRENGTH AT 28 DAYS. ALL CEMENT CONCRETE SHALL HAVE A COARSE AGGREGATE GRADATION CONFORMING TO SIZE No. 67. POLYPROPYLENE OR CELLULOSE FIBERS SHALL BE ADDED TO P.C.C. AT 1.5 LBS PER CUBIC YARD. MIX DESIGN SHALL CONFORM TO THE REQUIREMENTS OF SSPWC. ALL MATERIALS SHALL CONFORM TO SSPWC.



STANDARD DETAILS FOR PUBLIC WORKS CONSTRUCTION

PEDESTRIAN SAFETY RAILING

DRAWING No.

R-606

APPROVED BY: KK

DATE: 2/2026